

Conditioned Steam Humidifiers

industrial processes
office buildings
printing
hospitals
warehouses

Armstrong



Armstrong[®]

Intelligent System Solutions[™]

STEAM • AIR • HOT WATER





When It Comes to Improving Humidification... It Starts with Steam

Why the Armstrong Series 9000 humidifier starts with steam

Armstrong's improvements in steam humidification are so fundamentally different they begin not with the humidifier but with the steam.

Unlike other units which simply **disperse** steam, Armstrong's Series 9000 humidifiers work with it, subjecting it to the first of many steps in a carefully engineered process. Why? Because at Armstrong, improving humidification is extremely basic. It starts with steam. And what we've learned at that starting point has taught us how to improve the design of hardware – humidifiers – which distribute steam.


There's no name for what happens to steam in an Armstrong humidifier, so we've created one. We call it **conditioning**. To condition steam, we slow it down, remove its particulate matter, separate condensate from it, dry it and, finally, silence it.


Conditioned steam. It's the cornerstone of the Series 9000's superior performance and control. Here's why.

Drying chamber is jacketed by the separating chamber and is filled with a stainless steel silencing medium which absorbs most of the noise of escaping steam.

Interior baffles condition the steam by forcing it to make two 180° turns, providing optimum velocity reduction and maximum separation.

Reliable cast iron inverted bucket steam trap provides dependable draining because it has only two moving parts – and no fixed pivots or complicated linkage to stick, bind or clog.

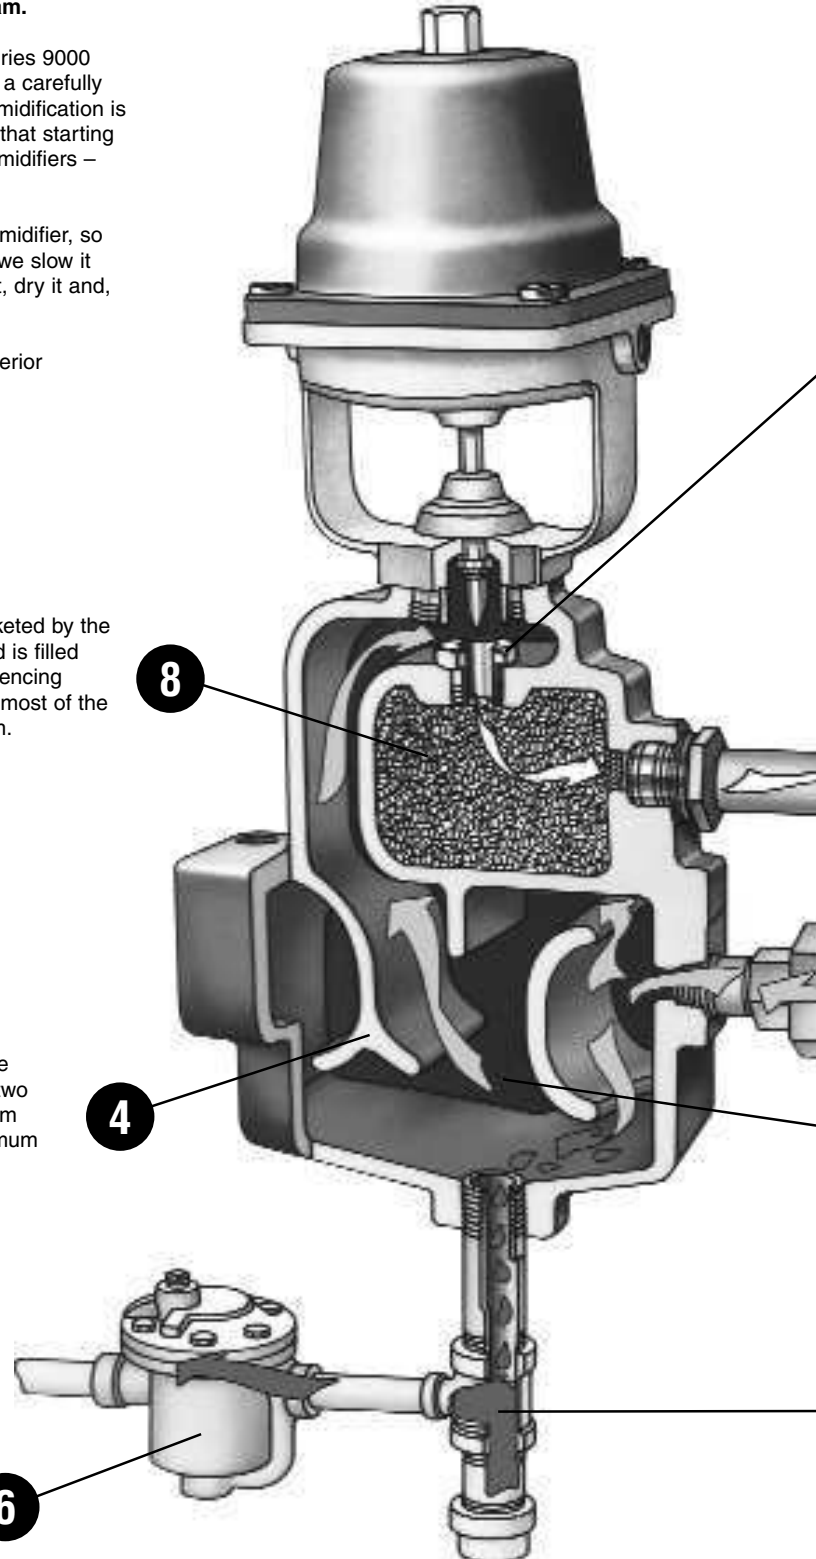

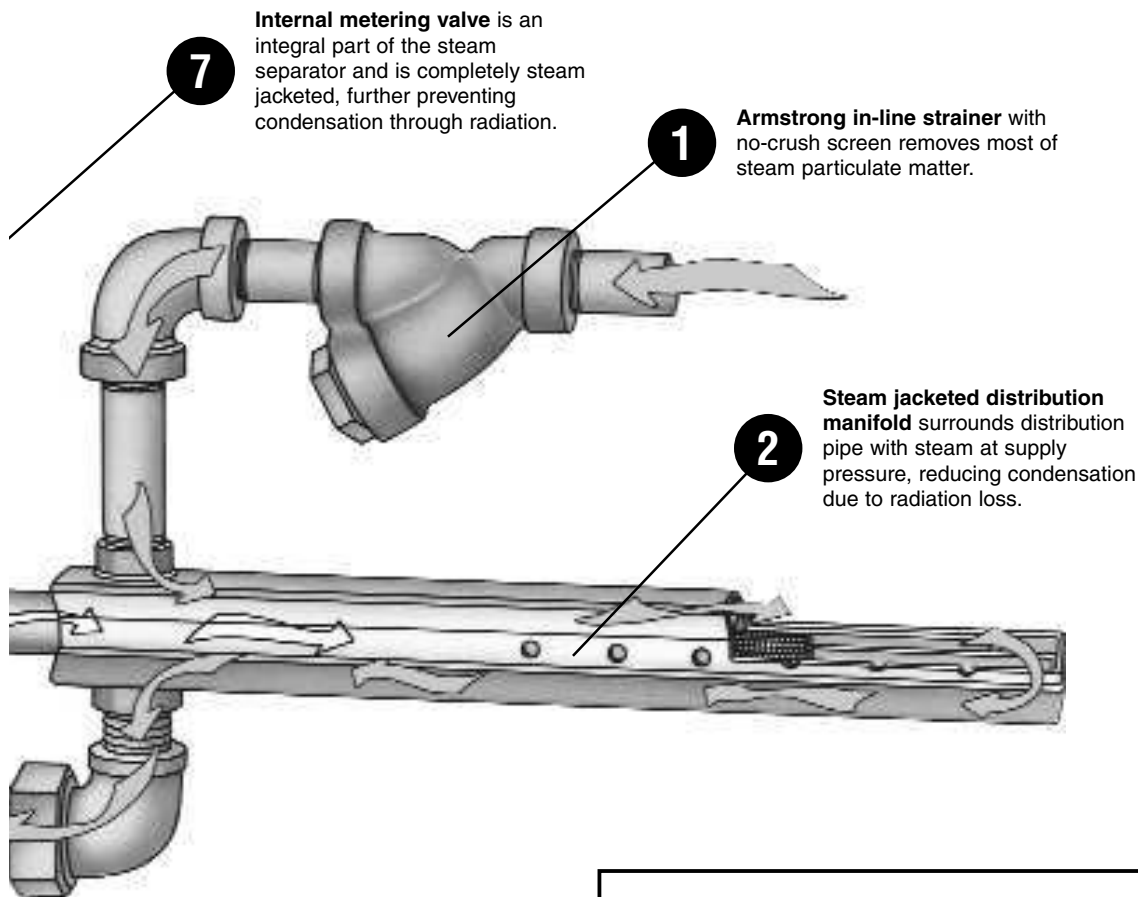

7 **Internal metering valve** is an integral part of the steam separator and is completely steam jacketed, further preventing condensation through radiation.

1 **Armstrong in-line strainer** with no-crush screen removes most of steam particulate matter.

2 **Steam jacketed distribution manifold** surrounds distribution pipe with steam at supply pressure, reducing condensation due to radiation loss.

3 **Strong cast iron separator** dampens noise and effects of vibration. Its thick walls mean better heat retention and therefore less condensation.

5 **Large drain leg** collects condensate and discharges through the drain trap.

Armstrong's four-step conditioning process

- **Straining.** The first step in steam conditioning, straining removes most of the steam's dirt and scale particles.
- **Separating.** In the cast iron separating chamber, a cupped baffle reverses the flow, forcing the steam back on itself. The outer walls of the chamber form another cup, and the same thing happens again. These two 180° turns reduce the velocity and separate the condensate from the vapor. The center baffle, positioned directly over the large drain connection, knocks down and further guides condensate out the drain.
- **Drying.** Steam entering the drying chamber is at supply temperature and essentially atmospheric pressure, so there is no condensation. Any remaining mist is re-evaporated before it leaves the humidifier.
- **Silencing.** The drying chamber is filled with a stainless steel silencing material which absorbs almost completely the noise of escaping steam as it is generated at the control valve.



Precise Control and Uniform Distribution

Humidifier control must provide immediate response and precise modulation in order to accurately maintain the required relative humidity. Faulty control can lead to overloading the ducts with moisture and the creation of wet spots or failure to provide the required humidity level.

Two design factors affect the accuracy of humidifier control – the metering valve and the actuator that positions the valve.

Precise flow control can be achieved with a valve designed expressly for the purpose of adding steam to air. All Armstrong modulating humidifiers employ unique parabolic plug type valves. See Figure 44-1.


Armstrong uses an exclusive modified plug for the control valve to accomplish this. The modification of true linear characteristics provides more precise control when capacity requirements are very low and the valve is just cracked off the seat. Notice in Chart 44-1 that at point A on the curve more than half the valve stroke is devoted to 40% of the unit's capacity. At point B, one-quarter of the stroke is devoted to only 10% of capacity. At point C, 10% of the stroke covers less than 5% of the unit's capacity.

How low can the unit control? Table 44-1 tabulates this function, called rangeability. Rangeability is the ratio between the maximum controllable flow and the minimum controllable flow of steam through the valve. The higher the rangeability of a valve, the more accurately it can control steam flow at low outputs.

To calculate this minimum flow, simply multiply Continuous Discharge Capacity by the percentage shown in Table 44-1. **For example**, a 9/32" orifice at 1 bar can discharge 34 kg/h. The lowest output that can be controlled is 2.5% of 34 or 0,85 kg/h.


Conditioned Steam Humidifiers

Figure 44-1. Parabolic Plug Metering Valve
Parabolic plug valve configuration permits accurate modulation of flow over the complete stroke of the valve.

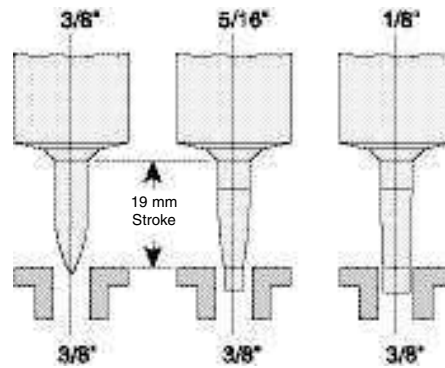

| Table 44-1. Steam Humidifier Valve Rangeabilities | | | |
|---|--------------------------------|-------------------------|---------------------------|
| Humidifier Models | Valve Equivalent Diameter (In) | Rangeability | |
| | | Ratio of Flow Max.:Min. | Minimum Flow % of Maximum |
| Model No. 94 | 1 1/2" | 63:1 | 1,6 |
| | 1 1/4" | 69:1 | 1,4 |
| | 1 1/8" | 61:1 | 1,6 |
| | 1" | 53:1 | 1,9 |
| | 7/8" | 44:1 | 2,3 |
| | 3/4" | 33:1 | 3,0 |
| | 5/8" | 25:1 | 4,0 |
| Model No. 93 | 3/4" | 118:1 | 0,8 |
| | 5/8" | 123:1 | 0,8 |
| | 9/16" | 105:1 | 0,9 |
| | 1/2" | 97:1 | 1,0 |
| | 15/32" | 85:1 | 1,2 |
| | 7/16" | 75:1 | 1,3 |
| | 13/32" | 64:1 | 1,6 |
| Model No. 92 | 1/2" | 97:1 | 1,0 |
| | 7/6" | 75:1 | 1,3 |
| Model No. 90, 91 or 92 | 3/8" | 70:1 | 1,4 |
| | 11/32" | 59:1 | 1,7 |
| | 5/16" | 49:1 | 2,0 |
| | 9/32" | 40:1 | 2,5 |
| | 1/4" | 31:1 | 3,2 |
| | 7/32" | 24:1 | 4,2 |
| | 3/16" | 18:1 | 5,6 |
| | 5/32" | 59:1 | 1,7 |
| | 1/8" | 37:1 | 2,7 |
| Model No. 90 or 91 | 7/64" | 28:1 | 3,5 |
| | 3/32" | 21:1 | 4,8 |
| | 5/64" | 15:1 | 6,9 |
| | 1/16" | 10:1 | 10,0 |

Chart 44-1. Modified linear characteristic curve for valves used under modulating control. The modification of true linear characteristics provides more precise control when capacity requirements are very low and the valve is just cracked off the seat.

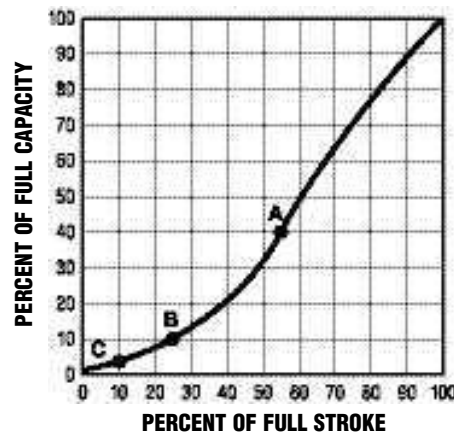

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.

Humidifier operators

The operator for the valve is equally important to humidifier control, and several types are available to provide compatibility with the system in which they are installed. The operator must be able to position the valve in very nearly identical relationship to the seat on both opening and closing strokes. This is essential in order to provide consistent, accurate metering of steam discharged by the humidifier.

By their design, electric motor modulating actuators provide true linear positioning characteristics on both opening and closing cycles. Pneumatic operators may or may not be able to provide the precise positioning and holding characteristics essential to accurate control.

Rolling diaphragm type pneumatic operators are recommended, providing they meet the following criteria:

1. Large diaphragm area – 77 cm² or more – to provide ample lifting force. This permits the use of a spring heavy enough to stabilize both the hysteresis effect and the flow velocity effect on the positioning of the valve stem versus air pressure to the operator.
2. Diaphragm material that is highly resistant to wear or weakening from continuous cycling and high temperatures.
3. Operator stroke long enough, in conjunction with valve plug and seat design, to provide high rangeability ratios.
4. Easy serviceability.

All modulating operators, whether electric or pneumatic, should incorporate a spring return. This is necessary to ensure closing of the valve if there is an interruption of power or control air to the unit.

For industrial in-plant operation and for certain very limited duct applications, a solenoid operator may be used to provide simple on/off operation. This type of operator should not be specified for duct applications without a detailed analysis of the system.

Temperature switches are recommended.

Temperature switches prevent humidifier operation until start-up condensate is drained and the entire unit is up to steam temperature, thus eliminating the possibility of spitting on cold start-up.


Either pneumatic or electric temperature switches are recommended in any system where the steam supply to the manifold jacket and humidifier body may be interrupted or turned off, such as summer cycles. Cold piping downstream of the on/off valves can generate spitting.

| Armstrong C-1801 | | Honeywell MP953D | |
|------------------|-------------------------|------------------|-----------------------------|
| Operating Range | Adjustable Start points | Operating Range | Non-Adjustable Start points |
| 0,34 bar | 0,21 bar minimum | 0,27 bar | 0,21 bar |
| 0,69 bar* | 0,21 bar minimum | 0,34 bar | 0,55 bar |
| | | 0,48 bar* | 0,27 bar |

* Standard spring - furnished when no spring range is specified.

Chart 45-1. Desirable Operating Characteristic for Pneumatic Actuators

Position of valve is very nearly identical on both opening and closing strokes at any given air pressure to the actuator.

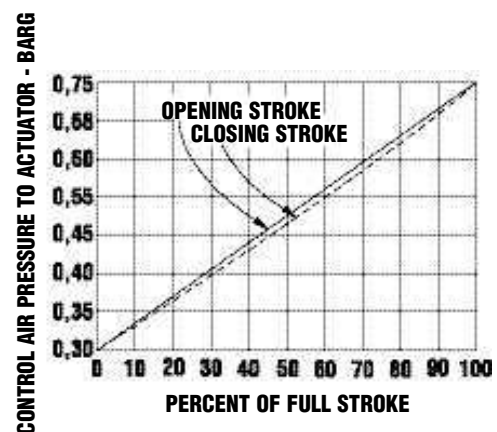

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.



Installation of Armstrong Duct-Type Humidifiers for Air Handling Systems

Armstrong Humidifiers for air handling systems may be installed in fan housings, plenums or ducts.

Normal manifold installation is with the manifold extending horizontally. When required, the manifold may extend vertically upward. It must not extend vertically downward.

Horizontal manifolds should be perfectly level with the discharge holes pointed upstream against the air flow. **Note:** If manifold is insulated, discharge holes must point downstream to prevent condensation on metal insulation cover. Manifolds over 30 cm in length should be supported.

Steam supply and condensate drain piping should be made in accordance with good piping practice. Trap discharge must be connected to a return line with pressure well below supply pressure to the humidifier. Please see Basic Application Principles in the Humidification Engineering section beginning on Page 24 of this catalogue.

Warning: Steam humidifiers (or other products) should be installed in locations that allow routine inspection and accessibility for maintenance operations. Armstrong recommends that steam humidifiers not be placed in locations where unusual instances of malfunction of the humidifiers or the systems might cause damage to non-repairable, unreplaceable, or priceless property.

Conditioned
Steam Humidifiers

Primary Methods of Installation

Figure 46-1. Method Number 1

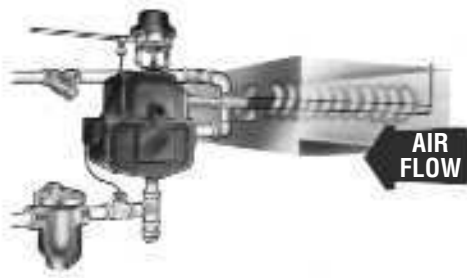


Figure 46-2. Method Number 2

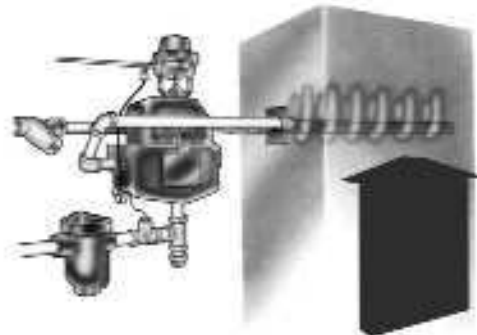


Figure 46-3. Method Number 3



Steam Supply Methods

Figure 47-1. Steam supply through manifold

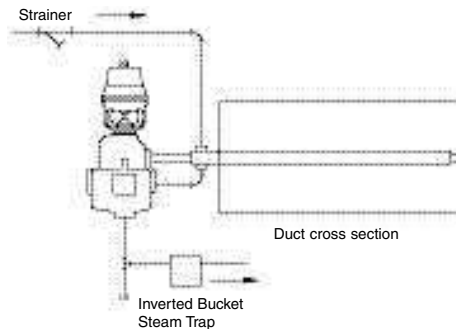


Figure 47-2. Steam supply direct to separator (Manifold trapped separately)


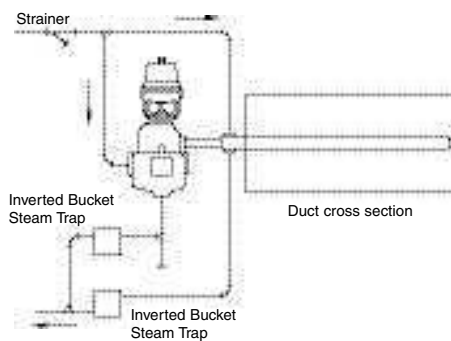


Figure 47-3. Steam supply direct to separator (Manifold trapped separately)

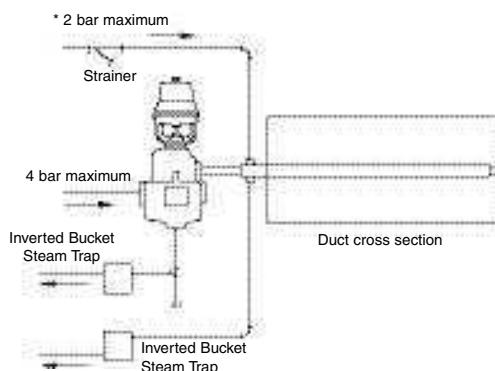

* 2 bar maximum for size 94 and 1400 manifolds.

How to Order

1. Mode of control pneumatic modulating – AM, electric modulating – EM

For industrial in-plant operation and for certain very limited duct applications, a solenoid actuator may be used to provide simple on-off operation. This type of actuator should not be specified for duct applications without a detailed analysis of the system – DSA.

2. Size of humidifier for duct installation – 91, 92, 93, 94
3. Manifold length from Table 51-2, Page 51.
4. Specify steam pressure and capacity required in accordance with Tables on Pages 52 and 53.
5. For electrically operated models, state electrical characteristics (control signal, and power supply voltage).

Suggested Specification

Steam Humidifiers for pneumatic or electric modulating control: Humidifier shall be the steam separator type providing full separation ahead of an integral steam jacketed control valve which discharges through an internal steam jacketed drying chamber, a silencing chamber and a steam jacketed distribution manifold.


- A. Humidifier shall receive steam at supply pressure and discharge at atmospheric pressure. It shall be furnished with inlet strainer and external inverted bucket steam trap.
- B. Separating chamber shall be of a volume and design that will disengage and remove all water droplets and all particulate matter larger than 3 microns when humidifier is operating at maximum capacity.
- C. The stainless steel metering valve shall be integral within the body of the humidifier, and shall be jacketed by steam at supply pressure and temperature to prevent condensation.
- D. The stainless steel metering valve shall be a parabolic plug with a 19 mm stroke, providing the high rangeabilities required to achieve full and accurate modulation of steam flow over the entire stroke of the valve.
- E. The internal drying chamber shall receive steam at essentially atmospheric pressure and be jacketed by steam at supply pressure and utilize a stainless steel silencing medium.
- F. The distribution manifold shall provide uniform distribution over its entire length and be jacketed by steam to assure that vapor discharged is free of water droplets.
- G. Humidifier shall be equipped with an interlocked temperature switch to prevent the humidifier from operating before start-up condensate is drained.



The Armstrong Series 9000 Humidifier

(physical data, dimensions and capacities)

Figure 48-1.

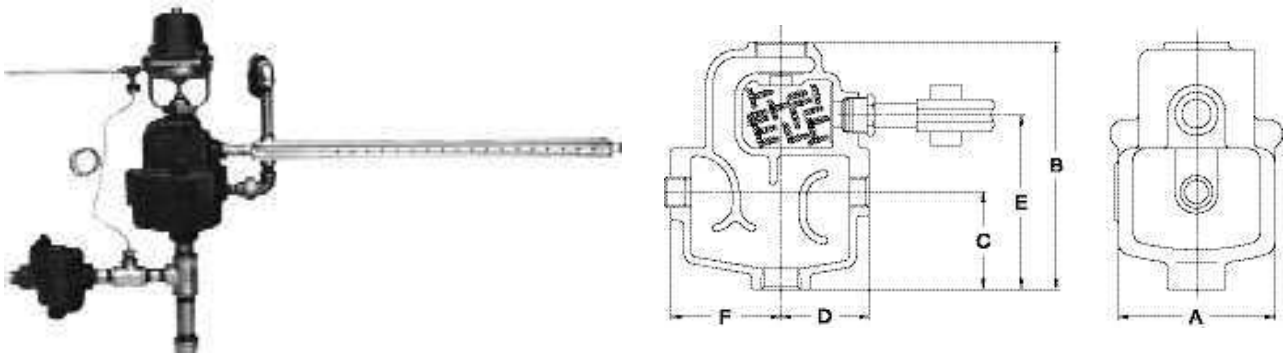

Conditioned Steam Humidifiers

Table 48-1. Physical Data

| Humidifier Model Number | Dimensions in mm | | | | | | Connection Sizes | | | Drain Trap Model | Weight in kg † (less operator and manifold) |
|-------------------------|------------------|-----|-----|-----|-----|-----|------------------|--------|------|------------------|---|
| | A | B* | C | D | E | F | Inlet | Drain | Trap | | |
| 91 | 115 | 218 | 86 | 78 | 154 | 97 | 1/2" | 1" | 3/4" | 800 | 11 |
| 92 | 141 | 218 | 86 | 97 | 154 | 97 | 3/4" | 1" | 3/4" | 800 | 14 |
| 93 | 171 | 302 | 117 | 121 | 229 | 121 | 1 1/4" | 1 1/4" | 3/4" | 811 | 24 |
| 94 | 276 | 435 | 175 | 203 | 321 | 203 | 2" | 2" | 3/4" | 812 | 66 |

Shade indicates products that are CE Marked according to the PED (97/23/EC). All the other sizes comply with the Article 3.3 of the same directive.

* Add height and weight of operator for overall data. All dimensions are in millimeters.

† Weight includes drain trap, strainer, and fittings.

For Physical Data on Series 1000 Stainless Steel Humidifiers, see Page 50.

Table 48-2. List of Materials

| | | | |
|-----------------|----------------------|-------------------|-----------|
| Steam Chamber | Cast Iron | Manifold Fittings | Brass |
| Bonnet Assembly | Brass | Manifold Coupler | Brass |
| Valve & Stem | 18-8 Stainless Steel | Nut | Brass |
| Valve Seat | 18-8 Stainless Steel | Strainer | Cast Iron |
| Manifold | 304 Stainless Steel | Steam Trap | Cast Iron |

Armstrong Conditioned-Steam Humidifiers for air handling systems are manufactured to meet the needs of central station humidification or booster humidification. Operation and control may be pneumatic or electric. See Page 54.

Standard Package

All Armstrong Conditioned-Steam Humidifiers are supplied in standard "packages" which include the following:

Pneumatically Controlled (AM) Models:

1. Humidifier with integral operator (when specified).
2. Distribution manifold of length specified.
3. "Y" type strainer.
4. Armstrong inverted bucket trap.

Electric Motor Controlled (EM) Models:

1. Humidifier with integral operator (when specified).
2. Distribution manifold specified.
3. "Y" type strainer.
4. Armstrong inverted bucket trap.

Recommended Option

A pneumatic or an electric temperature switch is offered as an optional extra and is recommended in any system where the steam supply to the manifold jacket and humidifier body may be interrupted or turned off.

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.

The Armstrong Series 1000 Stainless Steel Humidifier



Armstrong also offers a steam separator-type humidifier for use in sensitive environments where pure demineralized, deionized or distilled water is used to generate clean steam.


All wetted parts of the humidifier package are stainless steel, so the carry-over of impurities created by this highly corrosive water is minimized. Whenever carryover of impurities is a problem in steam discharge, the Armstrong Series 1000 solves it – with precisely controlled, trouble-free steam humidification.

- **Reduced corrosion threat.** Since Armstrong uses stainless steel for all wetted parts, the Series 1000 prevents problems caused by corrosion and subsequent carry-over of corrosion by-products.
- **No condensation through radiation.** The internal plug-type metering valve is an integral part of the steam separator and is completely steam jacketed to prevent condensation through radiation. What's more, the **steam jacketed** steam distribution manifold completely surrounds the distribution pipe with steam at supply pressure, further reducing condensation due to radiation loss.

- **Effective silencing.** Thanks to a drying chamber that is jacketed by the separating chamber and filled with a stainless steel silencing medium, most of the noise of escaping steam is absorbed.
- **Dry steam discharge.** Steam entering the drying chamber is at supply temperature and essentially atmospheric pressure, so any remaining mist is re-evaporated.
- **Maximum separation.** The interior baffle conditions the steam by forcing it to make two 180° turns, assuring optimum velocity reduction and maximum separation.
- **Dependable inverted bucket drainage.** With only two moving parts, the reliable, energy saving inverted bucket steam trap provides reliable drainage with a design that allows failure open – important on open-end service.

For Series 1000 humidifier capacities, see Pages 52 and 53.

Conditioned
Steam Humidifiers

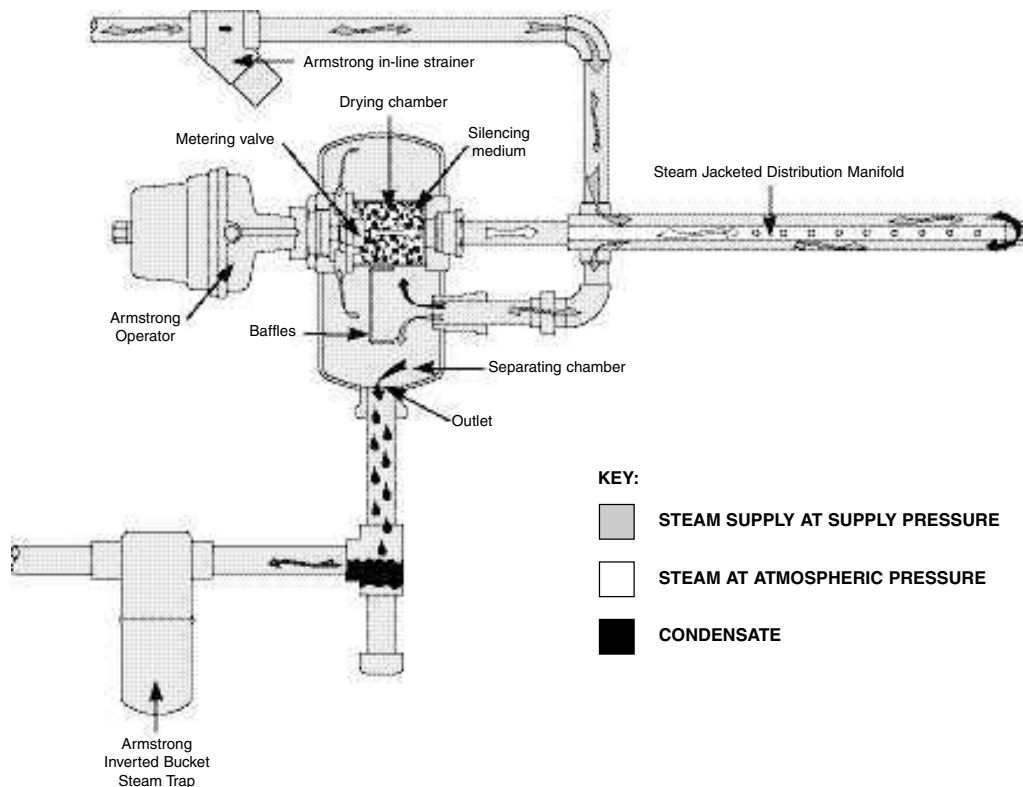



The Armstrong Series 1000 Humidifier, continued...

(physical data, dimensions and capacities)

Humidifier Operators.

Pneumatic Modulating
Electric Modulating
Electronic Modulating

Standard Package.

All Armstrong conditioned-steam humidifiers are supplied in standard "packages" which include the following.

Pneumatically controlled (AM) models:

1. Humidifier with integral operator (when specified).
2. Distribution manifold of length specified.
3. "Y" type strainer.
4. Armstrong inverted bucket trap.

Electric motor controlled (EM) models:


1. Humidifier with integral operator (when specified).
2. Distribution manifold of length specified.
3. "Y" type strainer.
4. Armstrong inverted bucket trap.

Recommended option: A pneumatic or an electric temperature switch is offered as an optional extra and is recommended in any system where the steam supply to the manifold jacket and humidifier body may be interrupted or turned off.

How To Order.

1. Mode of control:
pneumatic modulating – AM
electric modulating – EM
2. Size of humidifier for duct installation – 1100, 1200, 1300 or 1400.
3. Manifold length from Table 51-2.
4. Specify steam pressure and capacity required in accordance with appropriate table on Pages 52 and 53.
5. For electrically operated models, state electrical characteristics (control signal and power supply voltage).

Figure 50-1.

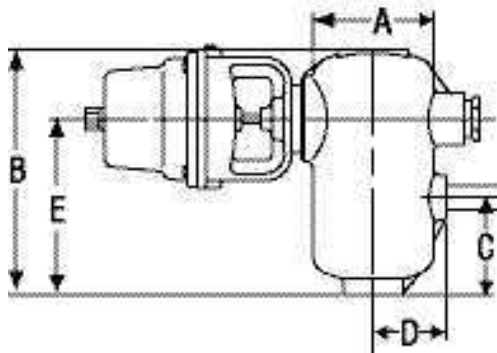

| | |
|--|--|
| Steam Chamber | T-316 CF8M Stainless Steel (model 1100 only) |
| | T-304 Stainless Steel (models 1200, 1300 and 1400) |
| Bonnet & Assembly Valve & stem Valve Seat Manifold & Fittings | 18-8 Stainless Steel |
| Operator | See Specifics |
| Strainer | ASTM 351 (T-316 SS) |
| Inverted Bucket Steam Trap | T-304 Stainless Steel |

Table 50-2 and 50-3. Physical Data

| Humidifier Model Number | Dimensions in mm | | | | | Connection Sizes | | | Drain Trap Model | Weight in kg † (less operator and manifold) |
|-------------------------|------------------|-----|-----|-----|-----|------------------|--------|------|------------------|---|
| | A* | B | C | D | E | Inlet | Drain | Trap | | |
| 1100 | 105 | 211 | 84 | 63 | 153 | 1/2" | 1" | 3/4" | 1811 | 14 |
| 1200 | 114 | 262 | 101 | 97 | 170 | 3/4" | 1" | 3/4" | 1811 | 14 |
| 1300 | 168 | 417 | 152 | 141 | 262 | 1 1/4" | 1 1/4" | 3/4" | 1811 | 15 |
| 1400 | 273 | 613 | 227 | 236 | 373 | 2" | 2" | 3/4" | 1812 | 36 |

Model 1400: PMA is limited to 1.85 bar. All sizes comply with the article 3.3 of the PED (97/23/EC).

* Add height and weight of operator for overall data. All dimensions are in millimeters.

† Weight includes drain trap, strainer, and fittings.

- Notes:**
1. For manifold lengths and duct widths with which they may be used, see Table 51-2, Page 51.
 2. All wetted parts are 300 Series stainless steel.

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.

Armstrong International SA • Parc Industriel des Hauts-Sarts (2^e Avenue) • 4040 Herstal • Belgium

Tel.: +32 (0)4 240 90 90 • Fax: +32 (0)4 248 13 61


www.armstrong.be • marketing@armstrong.be

Armstrong Distribution Manifolds for Air Handling Systems

(physical data, dimensions and capacities)



Figure 51-1. Steam Distribution Manifold Data

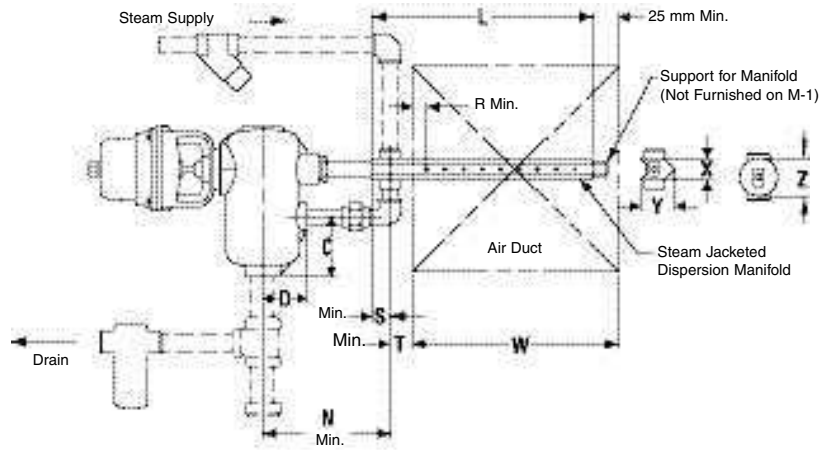

Conditioned
Steam Humidifiers

| Model | N | R | S | T | X | Y | Z | Steam Supply |
|-----------|-----|----|----|----|----|-----|----|--------------|
| 91 | 145 | 51 | 25 | 25 | 32 | 48 | 46 | 1/2" |
| 1100 | 217 | 51 | 25 | 25 | 32 | 48 | 46 | 1/2" |
| 92 & 1200 | 218 | 51 | 25 | 25 | 44 | 67 | 52 | 3/4" |
| 93 & 1300 | 230 | 51 | 41 | 41 | 54 | 79 | - | 1 1/4" |
| 94 & 1400 | 343 | 51 | 41 | 41 | 83 | 108 | - | 2" |

| 91 thru 94 Size and 1000 Manifold Model No. | M-1 | M-1,5 | M-2 | M-3 | M-4 | M-5 | M-6 | M-7 | M-8 | M-9 | M-10 | M-11 | M-12 |
|---|------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| L - Length (Meters) | 0,30 | 0,45 | 0,61 | 0,91 | 1,22 | 1,52 | 1,83 | 2,13 | 2,44 | 2,74 | 3,05 | 3,35 | 3,66 |
| W - Duct Width | (Minimum) | 0,20 | 0,38 | 0,53 | 0,79 | 1,09 | 1,36 | 1,66 | 1,97 | 2,27 | 2,58 | 2,88 | 3,18 |
| | (Maximum) | 0,36 | 0,51 | 0,76 | 1,07 | 1,32 | 1,63 | 1,93 | 2,24 | 2,54 | 2,84 | 3,15 | 3,45 |
| Approximate Shipping Weight (in kg) | 91 Size | 1,4 | 1,8 | 2,3 | 2,7 | 3,6 | 4,5 | 5,4 | 6,3 | 6,8 | 7,7 | 8,6 | 9,5 |
| | 92 Size and 1200 | 1,8 | 2,3 | 2,7 | 4,0 | 5,0 | 5,9 | 7,2 | 8,2 | 9,5 | 9,8 | 11,3 | 12,7 |
| | 93 Size and 1300 | 2,7 | 3,6 | 4,5 | 5,9 | 7,7 | 9,5 | 10,9 | 13,1 | 14,5 | 16,8 | 18,6 | 19,5 |
| 94 Size and 1400 | Consult Factory | | | | 10,9 | 13,6 | 15,4 | 18,1 | 20,4 | 23,1 | 24,9 | 27,2 | 29,0 |

All sizes comply with the article 3.3 of the PED (97/23/EC).
Note: Insulated manifolds are available. Consult factory.

| Duct Height in mm | No. of Manifolds |
|-------------------|------------------|
| 900 - 1 500 | 2 |
| 1 500 - 2 000 | 3 |
| 2 000 - 2 500 | 4 |
| 2 500 - Up | 5 or more |

If you have specific vapor trail considerations, please contact the Armstrong HVAC Application Engineering Department.

| Humidifier Size | Manifold Pipe Adapter No. | Pipe Connection Size |
|-----------------|---------------------------|----------------------|
| 91 | A-4967-B | 1/2" |
| 92 | A-4967 | 3/4" |
| 93 | A-4967-L | 1** |
| 94 | A-5002 | 2" |
| 1100 | A-4967-5 | 1/2" |
| 1200 | A-4967-P | 3/4" |
| 1300 | A-4967-R | 1** |
| 1400 | A-5002-C | 2" |

* Manifold tube is 1". Jacket connections are 1 1/4".

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.



Capacities of Armstrong Humidifiers

Conditioned Steam Humidifiers

Table 52-1. Sizes 91 and 1100, Continuous Discharge Capacities in kg of Steam Per Hour

| Orifice Size (In.) | Steam Pressure in bar | | | | | | | | | | | | | | | | | | |
|--------------------|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 0,15 | 0,20 | 0,25 | 0,35 | 0,40 | 0,50 | 0,55 | 0,60 | 0,70 | 0,75 | 0,80 | 0,90 | 1,00 | 1,40 | 1,70 | 2,00 | 2,50 | 3,00 | 4,00 |
| 1/16" | 0,6 | 0,7 | 0,8 | 1,0 | 1,1 | 1,2 | 1,3 | 1,4 | 1,5 | 1,6 | 1,7 | 1,8 | 2,0 | 2,5 | 2,9 | 3,5 | 3,8 | 4,5 | 5,6 |
| 5/64" | 1,0 | 1,2 | 1,4 | 1,6 | 1,8 | 2,0 | 2,1 | 2,3 | 2,4 | 2,5 | 2,7 | 2,8 | 3,0 | 3,8 | 4,8 | 5,0 | 5,6 | 6,7 | 8,6 |
| 3/32" | 1,4 | 1,7 | 1,9 | 2,3 | 2,6 | 2,8 | 3,0 | 3,3 | 3,5 | 3,7 | 3,9 | 4,0 | 4,3 | 5,4 | 6,0 | 6,5 | 7,8 | 9,6 | 11 |
| 7/64" | 1,9 | 2,2 | 2,6 | 3,1 | 3,6 | 4,0 | 4,1 | 4,5 | 4,6 | 5,0 | 5,2 | 5,4 | 6,0 | 7,2 | 8,0 | 8,6 | 9,5 | 12 | 15 |
| 1/8" | 2,5 | 3,1 | 3,3 | 4,0 | 4,5 | 5,0 | 5,5 | 5,9 | 6,3 | 6,3 | 6,8 | 7,2 | 8,0 | 10 | 11 | 13 | 14 | 16 | 20 |
| 5/32" | 3,6 | 4,5 | 5,1 | 6,3 | 7,2 | 7,7 | 8,6 | 9,0 | 9,5 | 10 | 11 | 12 | 13 | 14 | 16 | 18 | 20 | 24 | 29 |
| 3/16" | 5,5 | 6,8 | 7,7 | 10 | 11 | 12 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 22 | 24 | 27 | 29 | 35 | 42 |
| 7/32" | 7,5 | 10 | 11 | 13 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 24 | 28 | 32 | 35 | 38 | 44 | 64 |
| 1/4" | 10 | 13 | 14 | 17 | 19 | 21 | 22 | 24 | 25 | 27 | 28 | 29 | 31 | 37 | 41 | 46 | 52 | 61 | 77 |
| 9/32" | 12 | 15 | 16 | 20 | 21 | 23 | 25 | 26 | 28 | 29 | 30 | 32 | 34 | 40 | 48 | 52 | 57 | 68 | 84 |
| 5/16" | 15 | 17 | 19 | 23 | 25 | 27 | 29 | 31 | 33 | 35 | 37 | 39 | 42 | 48 | 56 | 61 | 67 | 90 | 114 |
| 11/32" | 16 | 20 | 22 | 25 | 30 | 33 | 35 | 37 | 39 | 41 | 43 | 44 | 49 | 58 | 67 | 78 | 86 | 104 | 126 |
| 3/8" | 19 | 23 | 25 | 30 | 32 | 35 | 37 | 42 | 44 | 48 | 50 | 52 | 57 | 68 | 77 | 86 | 96 | 115 | 143 |

Table 52-2. Sizes 92 and 1200, Continuous Discharge Capacities in kg of Steam Per Hour

| Orifice Size (In.) | Steam Pressure in bar | | | | | | | | | | | | | | | | | | |
|--------------------|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 0,15 | 0,20 | 0,25 | 0,35 | 0,40 | 0,50 | 0,55 | 0,60 | 0,70 | 0,75 | 0,80 | 0,90 | 1,00 | 1,40 | 1,70 | 2,00 | 2,50 | 3,00 | 4,00 |
| 1/8" | 2,2 | 3,2 | 3,6 | 4,0 | 4,5 | 5,0 | 5,5 | 6,0 | 6,8 | 7,0 | 8,0 | 9,0 | 10 | 11 | 12 | 13 | 14 | 16 | 20 |
| 5/32" | 3,6 | 4,5 | 5,5 | 6,3 | 7,3 | 7,7 | 8,6 | 9,0 | 9,5 | 10 | 11 | 12 | 13 | 14 | 16 | 18 | 20 | 24 | 29 |
| 3/16" | 5,4 | 6,8 | 8,2 | 9,5 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 21 | 24 | 27 | 29 | 35 | 42 |
| 7/32" | 7,2 | 9,5 | 11 | 13 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 24 | 28 | 32 | 38 | 41 | 47 | 61 |
| 1/4" | 10 | 11 | 15 | 17 | 19 | 21 | 22 | 24 | 25 | 27 | 28 | 29 | 31 | 37 | 41 | 46 | 52 | 61 | 77 |
| 9/32" | 12 | 16 | 19 | 22 | 24 | 26 | 29 | 30 | 32 | 34 | 36 | 37 | 40 | 47 | 53 | 59 | 69 | 80 | 97 |
| 5/16" | 15 | 20 | 23 | 27 | 30 | 32 | 35 | 37 | 39 | 42 | 44 | 45 | 49 | 57 | 65 | 72 | 85 | 96 | 118 |
| 11/32" | 18 | 24 | 28 | 32 | 35 | 38 | 41 | 44 | 46 | 49 | 52 | 54 | 59 | 69 | 78 | 87 | 101 | 114 | 142 |
| 3/8" | 24 | 27 | 29 | 35 | 38 | 42 | 45 | 47 | 52 | 54 | 56 | 58 | 63 | 74 | 83 | 93 | 103 | 122 | 151 |
| 7/16" | 34 | 38 | 41 | 45 | 49 | 53 | 56 | 60 | 62 | 65 | 68 | 72 | 77 | 89 | 102 | 114 | 126 | 157 | 190 |
| 1/2" | 40 | 43 | 45 | 47 | 51 | 55 | 60 | 64 | 68 | 72 | 76 | 79 | 88 | 104 | 121 | 136 | 151 | 181 | 220 |

Table 52-1. Sizes 93 and 1300, Continuous Discharge Capacities in kg of Steam Per Hour

| Capacities when Steam Supply is Through the Manifold | | | | | | | | | | | | | | | | | | | |
|--|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Orifice Size (In.) | Steam Pressure in bar | | | | | | | | | | | | | | | | | | |
| | 0,15 | 0,20 | 0,25 | 0,35 | 0,40 | 0,50 | 0,55 | 0,60 | 0,70 | 0,75 | 0,80 | 0,90 | 1,00 | 1,40 | 1,70 | 2,00 | 2,50 | 3,00 | 4,00 |
| 13/32" | 32 | 38 | 45 | 50 | 55 | 60 | 63 | 67 | 69 | 73 | 77 | 78 | 84 | 96 | 112 | 122 | 135 | 161 | 200 |
| 7/16" | 35 | 43 | 49 | 57 | 59 | 63 | 66 | 70 | 77 | 80 | 86 | 89 | 97 | 112 | 129 | 142 | 152 | 182 | 225 |
| 15/32" | 38 | 55 | 59 | 66 | 68 | 71 | 76 | 82 | 88 | 92 | 96 | 102 | 108 | 128 | 145 | 161 | 175 | 203 | 248 |
| 1/2" | 45 | 58 | 66 | 73 | 78 | 84 | 90 | 92 | 98 | 103 | 110 | 115 | 123 | 146 | 165 | 185 | 197 | 227 | 282 |
| 9/16" | 47 | 62 | 72 | 84 | 89 | 94 | 102 | 108 | 117 | 121 | 123 | 128 | 141 | 163 | 185 | 207 | 234 | 279 | 342 |
| 5/8" | 53 | 67 | 79 | 92 | 97 | 106 | 114 | 124 | 131 | 134 | 144 | 153 | 167 | 194 | 221 | 248 | 275 | 328 | 408 |
| 3/4" | 58 | 79 | 92 | 105 | 116 | 130 | 140 | 153 | 164 | 170 | 173 | 186 | 208 | 249 | 289 | 338 | 385 | 452 | 576 |

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.

Table 53-2. Sizes 93 and 1300, Continuous Discharge Capacities in kg of Steam Per Hour

| Capacities when Steam Supply is Direct to Separator. (Manifold Trapped Separately) | | | | | | | | | | | | | | | | | | | |
|--|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Orifice Size (In.) | Steam Pressure in bar | | | | | | | | | | | | | | | | | | |
| | 0,15 | 0,20 | 0,25 | 0,35 | 0,40 | 0,50 | 0,55 | 0,60 | 0,70 | 0,75 | 0,80 | 0,90 | 1,00 | 1,40 | 1,70 | 2,00 | 2,50 | 3,00 | 4,00 |
| 13/32" | 32 | 38 | 45 | 50 | 55 | 60 | 63 | 67 | 69 | 73 | 77 | 78 | 84 | 96 | 112 | 122 | 135 | 161 | 200 |
| 7/16" | 35 | 43 | 49 | 57 | 59 | 63 | 66 | 70 | 77 | 80 | 86 | 89 | 97 | 112 | 130 | 142 | 152 | 182 | 225 |
| 15/32" | 38 | 55 | 59 | 66 | 68 | 71 | 76 | 82 | 88 | 92 | 96 | 102 | 108 | 128 | 145 | 161 | 175 | 203 | 248 |
| 1/2" | 45 | 58 | 66 | 73 | 78 | 84 | 90 | 92 | 98 | 103 | 110 | 115 | 123 | 146 | 165 | 185 | 197 | 227 | 282 |
| 9/16" | 47 | 62 | 72 | 84 | 89 | 94 | 102 | 108 | 117 | 121 | 123 | 128 | 141 | 163 | 185 | 207 | 234 | 279 | 342 |
| 5/8" | 57 | 73 | 83 | 95 | 102 | 112 | 119 | 129 | 139 | 142 | 152 | 162 | 173 | 209 | 232 | 261 | 291 | 343 | 443 |
| 3/4" | 62 | 85 | 100 | 119 | 122 | 136 | 152 | 171 | 186 | 195 | 210 | 225 | 238 | 288 | 336 | 375 | 422 | 500 | 620 |

Table 53-3. Sizes 94 and 1400, Continuous Discharge Capacities in kg of Steam Per Hour

| Capacities when Steam Supply is Through the Manifold | | | | | | | | | | | | | | | | | |
|--|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| Orifice Size (In.) | Steam Pressure in bar | | | | | | | | | | | | | | | | |
| | 0,15 | 0,20 | 0,25 | 0,35 | 0,40 | 0,50 | 0,55 | 0,60 | 0,70 | 0,75 | 0,80 | 0,90 | 1,00 | 1,40 | 1,70 | 2,00 | |
| 5/8" | 62 | 76 | 86 | 97 | 102 | 114 | 121 | 131 | 142 | 148 | 159 | 169 | 188 | 217 | 245 | 275 | 275 |
| 3/4" | 84 | 103 | 117 | 132 | 140 | 154 | 164 | 177 | 193 | 201 | 215 | 229 | 252 | 310 | 350 | 390 | 390 |
| 7/8" | 110 | 135 | 153 | 171 | 184 | 202 | 215 | 232 | 251 | 264 | 282 | 300 | 344 | 396 | 452 | 503 | 503 |
| 1" | 126 | 156 | 177 | 198 | 212 | 234 | 248 | 269 | 290 | 304 | 326 | 347 | 386 | 450 | 514 | 575 | 575 |
| 1 1/8" | 145 | 180 | 204 | 230 | 245 | 269 | 286 | 310 | 339 | 351 | 376 | 400 | 422 | 507 | 591 | 666 | 666 |
| 1 1/4" | 156 | 190 | 215 | 251 | 259 | 284 | 302 | 327 | 361 | 371 | 396 | 422 | 448 | 536 | 631 | 711 | 711 |
| 1 1/2" | 177 | 222 | 253 | 282 | 303 | 334 | 354 | 384 | 417 | 435 | 465 | 496 | 523 | 633 | 729 | 824 | 824 |

Table 53-4. Sizes 94 and 1400, Continuous Discharge Capacities in kg of Steam Per Hour

| Capacities when Steam Supply is Direct to Separator. (Manifold Trapped Separately) | | | | | | | | | | | | | | | | | | | |
|--|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|
| Orifice Size (In.) | Steam Pressure in bar | | | | | | | | | | | | | | | | | | |
| | 0,15 | 0,20 | 0,25 | 0,35 | 0,40 | 0,50 | 0,55 | 0,60 | 0,70 | 0,75 | 0,80 | 0,90 | 1,00 | 1,40 | 1,70 | 2,00 | 2,50 | 3,00 | 4,00 |
| 5/8" | 62 | 76 | 86 | 97 | 102 | 114 | 121 | 131 | 142 | 148 | 159 | 169 | 188 | 217 | 245 | 275 | 303 | 357 | 461 |
| 3/4" | 90 | 110 | 125 | 140 | 150 | 165 | 175 | 190 | 205 | 215 | 230 | 244 | 275 | 321 | 358 | 404 | 445 | 533 | 656 |
| 7/8" | 114 | 140 | 159 | 178 | 191 | 210 | 222 | 241 | 260 | 273 | 292 | 311 | 358 | 412 | 461 | 520 | 576 | 697 | 847 |
| 1" | 136 | 170 | 193 | 222 | 231 | 254 | 270 | 293 | 326 | 332 | 355 | 378 | 425 | 488 | 559 | 632 | 693 | 832 | 1 038 |
| 1 1/8" | 168 | 210 | 238 | 267 | 286 | 314 | 333 | 362 | 378 | 410 | 438 | 467 | 505 | 605 | 698 | 769 | 859 | 1 026 | 1 280 |
| 1 1/4" | 187 | 235 | 267 | 300 | 320 | 352 | 373 | 405 | 435 | 459 | 490 | 523 | 551 | 674 | 784 | 883 | 979 | 1 182 | 1 454 |
| 1 1/2" | 245 | 299 | 340 | 381 | 408 | 449 | 476 | 517 | 547 | 585 | 626 | 667 | 699 | 843 | 961 | 1 096 | 1 201 | 1 448 | 1 823 |

Model 1400: PMA is limited to 1,85 bar.
 Shaded capacities are valid for model 94 only.

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.



Operators Installed on Armstrong Humidifiers

Operator Types



Armstrong C-1801 pneumatic operator for humidifiers under modulating control. Adjustable start points and various air pressure ranges. (See Table 45-1, Page 45.)



Standard Honeywell MP953D pneumatic operator for humidifiers under modulating control. Operating spring ranges and start points are shown in Table 45-1, Page 45. Operational start point adjustment is available in the form of a pilot positioner where required.



Standard electric operator for humidifiers under modulating electrical control. Choice of Honeywell ML7425A operator (24V 60Hz), Belimo AF24SR (shown above, 24V 60 Hz standard), or Belimo NVF24 (24V 60Hz). Transformers for other voltages available for all electric operators.



Standard ASCO electric solenoid operator for humidifiers under on-off control. **Caution:** On-off operation of humidifiers in air handling systems is advisable only for very limited, specialized applications. Consult your Armstrong Representative.

Humidifier operators in stock

1. Pneumatic Modulating

Armstrong C-1801
Honeywell MP953D and F
Sauter AV42 P10

2. Electric Modulating

Honeywell ML7425A
Belimo AF24SR
NVF24

3. Solenoid

Asco Class H Coil

Other humidifier operators that might be installed on Armstrong humidifiers*

1. Pneumatic Modulating


Barber-Colman MK-4600 Series
Fisher Governor 513 R
513 R with 3582 positioner
Honeywell 600
Type 9
Johnson PA 20/150
Samson 271/240
271/350

2. Electric Modulating

Baelz Type E11
Barber-Colman MPR-5600, MPR-5700
MP-5210
MP-361, MP-461
Honeywell M7285A
Johnson/Penn M130XG-A
Siemens SKD62 with ASK50
Satchwell Type ALES-ALXS-ALZS
Sauter AVN1H12F020
AVN1H12F001

Note: Any operator with a reverse acting (lift to open) 19 mm stroke and spring return can usually be adapted. Consult factory for details.

* Request Armstrong Application Guideline APP-505 for details on control signal and power requirements.

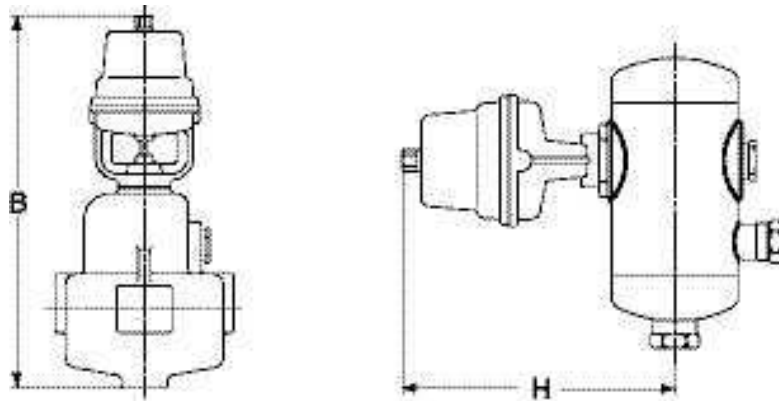
Table 55-1. Dimensions (in mm) and Weights with Operators Installed

| Mode of Control | Pneumatic Modulating | | | Electric Modulating | | | Electric On-Off |
|--------------------|----------------------|------------------|----------------|---------------------|---------------|-----------------------|-----------------|
| | Armstrong C-1801 | Honeywell MP953D | Sauter AV42P10 | Honeywell ML7425A | Belimo AF24SR | Belimo NVF24-MFT-US-E | ASCO |
| "B" - 91 Size | 406 | 368 | 549 | 501 | 560 | 481 | 276 |
| 92 Size | 406 | 368 | 549 | 501 | 576 | 481 | 276 |
| 93 Size | 495 | 454 | 633 | 585 | 665 | 565 | 368 |
| 94 Size | – | 622 | 766 | 718 | 789 | 697 | – |
| "H" - 1100 Size | 238 | 203 | 384 | 336 | 407 | 370 | 111 |
| 1200 Size | 243 | 208 | 388 | 340 | 413 | 375 | 116 |
| 1300 Size | 273 | 235 | 415 | 367 | 440 | 402 | 143 |
| 1400 Size | – | 287 | 468 | 420 | 492 | – | – |
| Weight of Operator | 3,5 kg | 2,7 kg | 2,3 kg | 2,4 kg | 5,9 kg | 2 kg | 0,3 kg |

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.